

SIGNAL ISOLATED TRANSMITTER (TWO OUTPUT)

XC-DTD

FEATURES

- Converting a DC input into a standard process signal.
- Two isolated output.
- 4 way isolated.
- DIN rail type.



ORDERING INFORMATION

MODEL:XC-DTD- □□□□

DC Input Range (Input Resistance)

V1: 0 ~ 50mV*	(\geq 200K Ω)
V2: 0 ~ 5V	(\geq 1M Ω)
V3: 1 ~ 5V	(\geq 1M Ω)
V4: 0 ~ 10V	(\geq 1M Ω)
A1: 0 ~ 1mA	(\leq 1K Ω)
A3: 0 ~ 20mA	(\leq 50 Ω)
A4: 4 ~ 20mA	(\leq 50 Ω)
00: Option	

*0 ~ 75mV is available

DC Output Range - 1 (Output Resistance)

V2: 0 ~ 5V (\geq 1K Ω)	A1: 0 ~ 1mA (0~10K Ω)
V3: 1 ~ 5V (\geq 1K Ω)	A2: 0 ~ 10mA (0~1K Ω)
V4: 0 ~ 10V(\geq 1K Ω)	A3: 0 ~ 20mA (0~500 Ω)
00: Option	A4: 4 ~ 20mA (0~500 Ω)

DC Output Range - 2 (Output Resistance)


V2: 0 ~ 5V (\geq 1K Ω)	A1: 0 ~ 1mA (0~10K Ω)
V3: 1 ~ 5V (\geq 1K Ω)	A2: 0 ~ 10mA (0~700 Ω)
V4: 0 ~ 10V(\geq 1K Ω)	A3: 0 ~ 20mA (0~350 Ω)
00: Option	A4: 4 ~ 20mA (0~350 Ω)

Power Supply

A: AC / DC 90 ~ 260V B: DC 20 ~ 60V

0: Option


THE OUTSIDE DIMENSION (UNIT: mm)

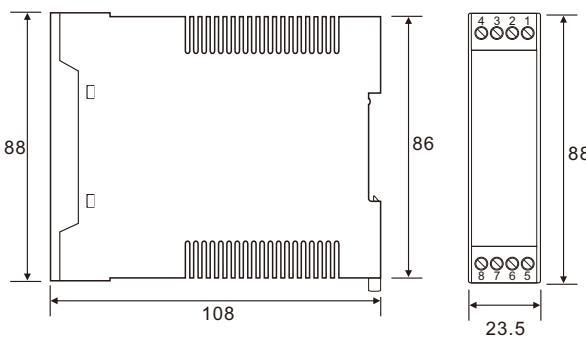

SPECIFICATION

Accuracy	$\pm 0.1\%$ RO.
Response time	$\leq 400\text{msec.}$ 0 ~ 99%
Output ripple	$\leq 0.5\%$ RO. (Peak)
Power supply	AC / DC 90 ~ 260V DC 20 ~ 60V
Power consumption	at 240V \leq AC 7.5VA \leq DC 6W 110V \leq AC4VA \leq DC 4W
Temperature coefficient	$\leq 0.015\%/\text{°C}$
Operating temperature	- 5 ~ 50°C
Storage temperature	-10 ~ 70°C
Max. relative humidity	90%
Isolation	Input/Output/Power
Dielectric strength	AC 1.8KV/min. Output 1/Output 2 AC 1.0KV/min.
Insulation resistance	$\geq 100\text{M}\Omega$, DC 500V
Electrostatic discharge	IEC 61000-4-2.
Electromagnetic fields immunity	IEC 61000-4-3.
Electrical transient in burst	IEC 61000-4-4.
Withstanding impulse voltage	IEC 61000-4-5.
Immunity to voltage dips	IEC 61000-4-11.
Weight	Abt.140g

DEMAND FOR MOUNTING (UNIT: mm)

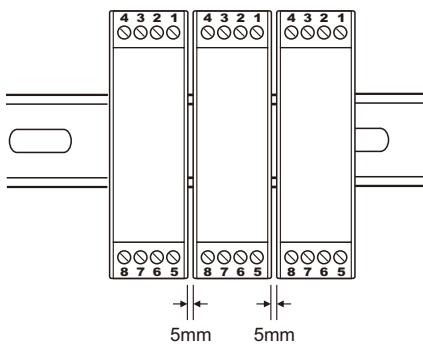

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

